




受枠


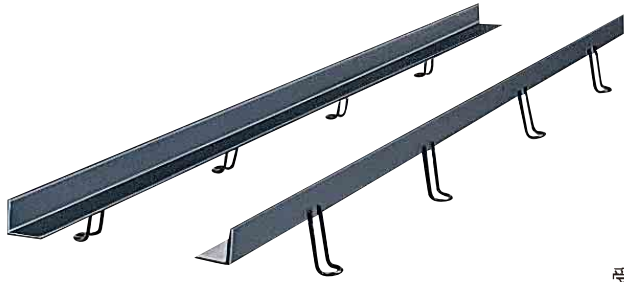


AT-1
標準

ATZ-1
溶融亜鉛めっき

■製品情報

- 受枠はグレーチングにかかる荷重を分散して、コンクリート受枠及び角部の破損を防ぐために施工します。
- 受枠の長さは2000mmを標準とします。

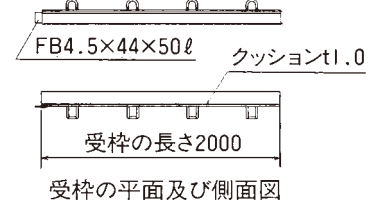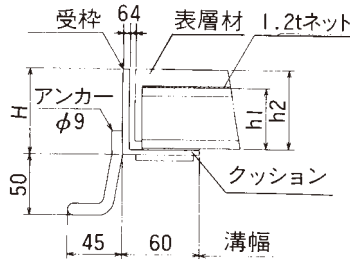

(単位：mm)

型式記号	グレーチング h2	受枠寸法 H×W×t-L	アンカー φD	受枠質量 (kg/本)	価格(円)
AT 1-32	32	L38×60×6-2000	9	8.9	4,800
AT 1-38	38	L44×60×6-2000	9	9.4	5,400
AT 1-44	44	L50×60×6-2000	9	10.0	5,600
AT 1-50	50	L56×60×6-2000	9	10.8	6,000
AT 1-55	55	L61×60×6-2000	9	11.1	6,200
AT 1-60	60	L66×60×6-2000	9	11.8	6,400
AT 1-67	65	℞73×60×6-2000	9	12.5	6,600

(単位：mm)



型式記号	グレーチング h2	受枠寸法 H×W×t-L	アンカー φD	受枠質量 (kg/本)	価格(円)
ATZ 1-32	32	L38×60×6-2000	9	8.9	7,800
ATZ 1-38	38	L44×60×6-2000	9	9.4	8,440
ATZ 1-44	44	L50×60×6-2000	9	10.0	9,130
ATZ 1-50	50	L56×60×6-2000	9	10.8	9,580
ATZ 1-55	55	L61×60×6-2000	9	11.1	9,940
ATZ 1-60	60	L66×60×6-2000	9	11.8	10,220
ATZ 1-67	65	℞73×60×6-2000	9	12.5	10,510

インターロッキングブロック用受枠



■製品情報

- 受枠はグレーチングにかかる荷重を分散して、コンクリート受枠及び角部の破損を防ぐために施工します。
- 受枠の長さは2000mmを標準とします。

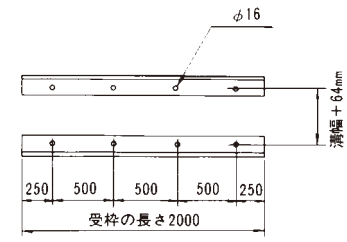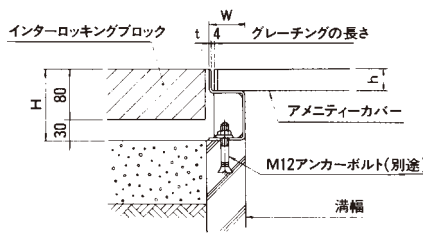

アンカーボルト取付位置

LI-1

(単位：mm)

型式記号	グレーチング	受枠寸法 H×W×t-L	アンカー	受枠質量 (kg/本)	価格(円)
	h2		φD		
LI 1-32	32	℞ 110×35.5×57.2×3.2-2000	16 (M12アンカーボルト)	12.0	12,000
LI 1-38	38	℞ 110×41.5×57.2×3.2-2000		12.0	12,000
LI 1-44	44	℞ 110×47.5×57.2×3.2-2000		12.0	12,000
LI 1-50	50	℞ 110×53.5×57.2×3.2-2000		12.0	12,000
LI 1-55	55	℞ 110×58.5×57.2×3.2-2000		13.0	12,000
LI 1-60	60	℞ 110×63.5×57.2×3.2-2000		13.0	12,000
LI 1-65	65	℞ 110×68.5×57.2×3.2-2000		13.0	12,000
LI 1-75	75	℞ 110×78.5×57.2×3.2-2000		13.0	12,000

