

受枠

錆止め塗装




溶融亜鉛めっき

■製品情報

- 受枠はグレーチングにかかる荷重を分散して、コンクリート受部及び角部の破損を防ぐために施工します。
- 受枠長さは2000mmを標準とします。

GT-1

GTZ-1

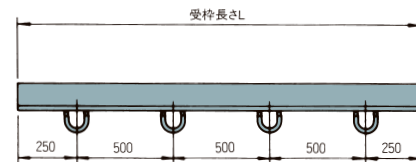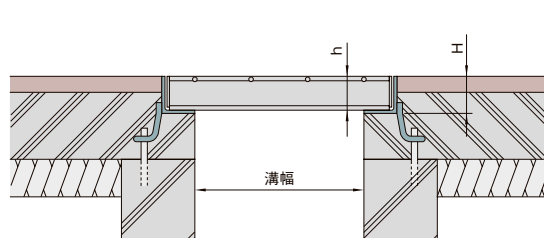

表面処理

GT-1 : 錆止め塗装(黒)

GTZ-1 : 溶融亜鉛めっき

■GT-1 錆止め塗装(標準品)

(単位: mm)

型式記号	グレーチング 寸法 h	受枠寸法 H×W×t-L	アンカー φD	受枠質量 (kg/本)	価格 (円/2m)	コーナー加工 (円/箇所)
GT-1-19	19	L23.5×58.5×4.5-2000	9	5.9	6,000	1,600
GT-1-25	25	L31×60×6-2000		8.4	6,600	1,600
GT-1-32	32	L38×60×6-2000		9.1	6,800	1,700
GT-1-38	38	L44×60×6-2000		9.6	7,700	1,700
GT-1-44	44	L50×60×6-2000		10.2	8,200	1,700
GT-1-50	50	L56×60×6-2000		11.0	8,600	1,800
GT-1-55	55	L61×60×6-2000		11.3	8,900	1,800
GT-1-60	60	L66×60×6-2000		11.7	9,100	1,800
GT-1-65	65	L71×60×6-2000		12.2	9,300	1,800
GT-1-70	70	L76×60×6-2000		12.3	9,400	1,800
GT-1-75	75	L81×60×6-2000	9	12.8	9,500	1,800
GT-1-80	80	L86×60×6-2000		13.2	11,800	1,800
GT-1-90	90	L96×60×6-2000		14.2	12,000	1,900
GT-1-95	95	L101×60×6-2000		14.7	12,100	1,900
GT-1-100	100	L106×60×6-2000		15.1	12,200	1,900
GT-1-105	105	L111×60×6-2000		15.6	14,200	1,900

■GTZ-1 溶融亜鉛めっき仕上

(単位: mm)

型式記号	グレーチング 寸法 h	受枠寸法 H×W×t-L	アンカー φD	受枠質量 (kg/本)	価格 (円/2m)	コーナー加工 (円/箇所)
GTZ-1-19	19	L23.5×58.5×4.5-2000	9	5.9	10,700	1,600
GTZ-1-25	25	L31×60×6-2000		8.4	11,300	1,600
GTZ-1-32	32	L38×60×6-2000		9.1	11,400	1,700
GTZ-1-38	38	L44×60×6-2000		9.6	12,300	1,700
GTZ-1-44	44	L50×60×6-2000		10.2	13,800	1,700
GTZ-1-50	50	L56×60×6-2000		11.0	14,200	1,800
GTZ-1-55	55	L61×60×6-2000		11.3	14,700	1,800
GTZ-1-60	60	L66×60×6-2000		11.7	15,000	1,800
GTZ-1-65	65	L71×60×6-2000		12.2	15,400	1,800
GTZ-1-70	70	L76×60×6-2000		12.3	15,500	1,800
GTZ-1-75	75	L81×60×6-2000	9	12.8	15,600	1,800
GTZ-1-80	80	L86×60×6-2000		13.2	19,100	1,800
GTZ-1-90	90	L96×60×6-2000		14.2	19,300	1,900
GTZ-1-95	95	L101×60×6-2000		14.7	19,700	1,900
GTZ-1-100	100	L106×60×6-2000		15.1	19,800	1,900
GTZ-1-105	105	L111×60×6-2000		15.6	21,800	1,900

スチールグレーチング

