
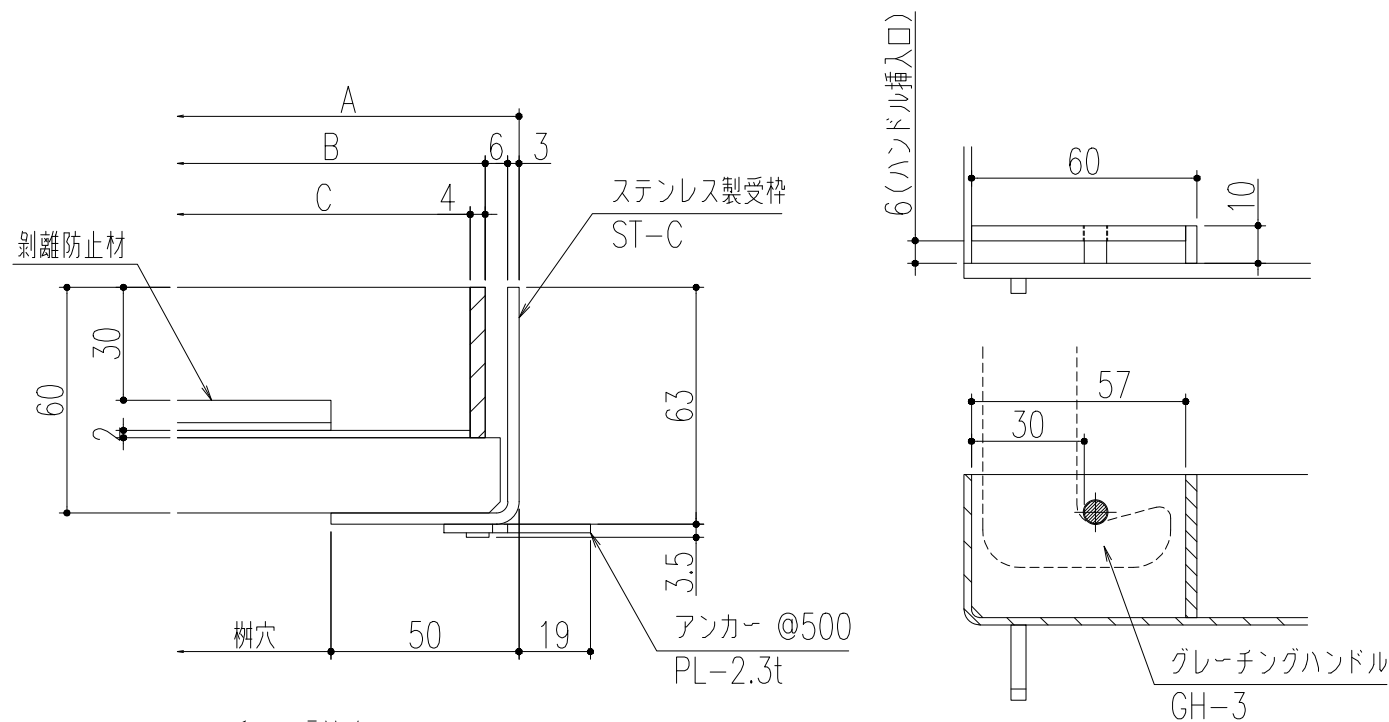


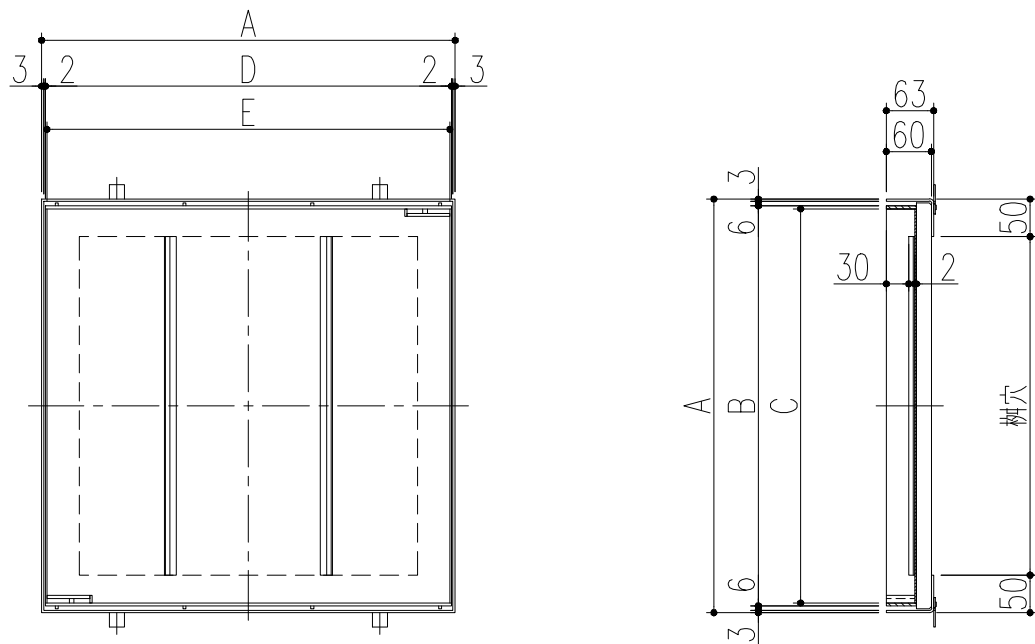

断面詳細図
(S=1/2)

取手部詳細図
(S=1/2)

仕 様



ステンレス製カラー舗装用樹蓋
STUM-1-TYPE スキマ6
材質;SUS304
表面処理;溶接焼け除去(目地部)
ステンレス製受枠
ST-C(L-63x50x3)
材質;SUS304
;アンカー-SPCC(黒染め)

600	STUM-1-600	700	682	674	690	686	12.1
450	STUM-1-450	550	532	524	540	536	8.2
300	STUM-1-300	400	382	374	390	386	4.8
樹穴	型式記号	A	B	C	D	E	計算質量 (kg/枚)

＊開閉には専用ハンドルGH-3をご使用ください。

△					第三 角 法	担 当	年 月 日	尺 度	名 称	ステンレス製カラー舗装用樹蓋 (歩道用)	図 番	DRB2180003-1	
△						製 図	後藤	18.11.30					1/10
△						検 図	後藤	〃					
①	アンカー仕様変更	'23.6.1	近藤	近藤		承認	近藤	〃					
記 号	変更内容・理由	年 月 日	担 当	承認									
										品 名	STUM-1-TYPE スキマ6 / ST-C (スリットなし・パッキンなし)	株式会社 中部コーポレーション	

特記事項・・・指示なき製作基準は製品規格による。

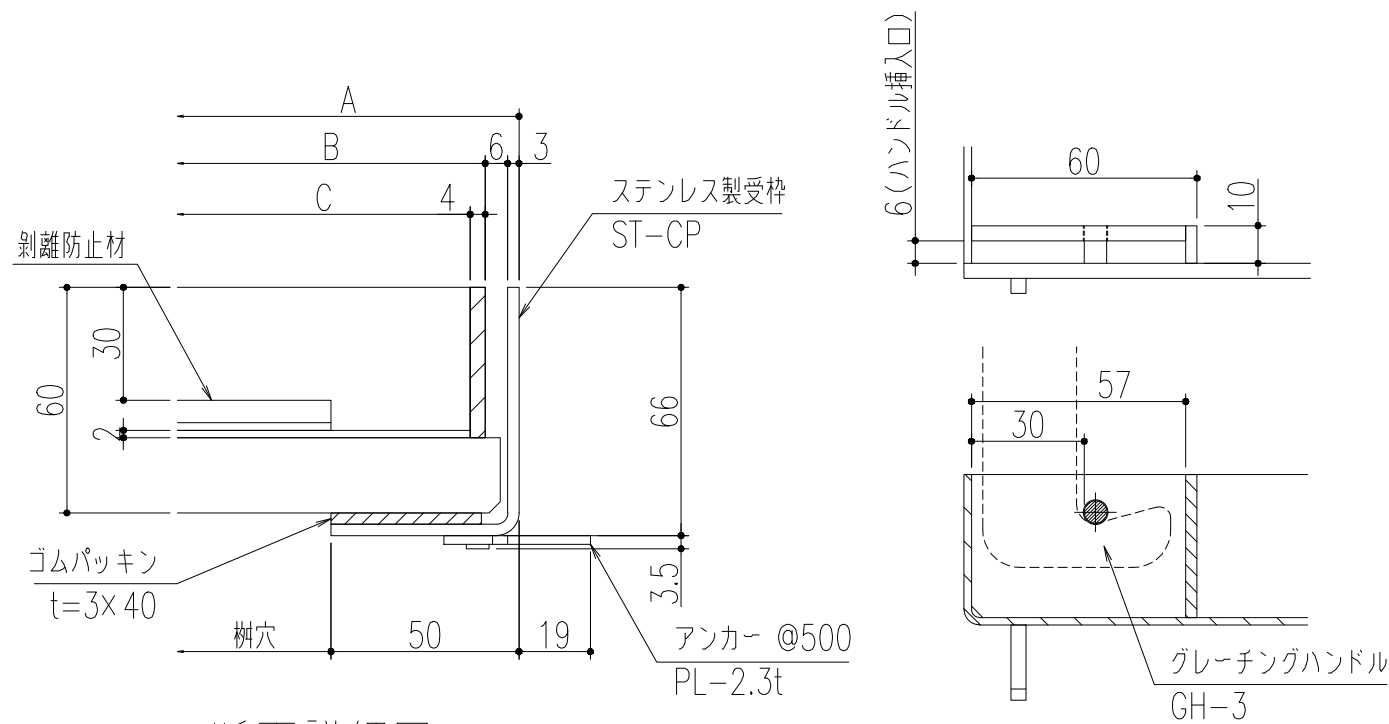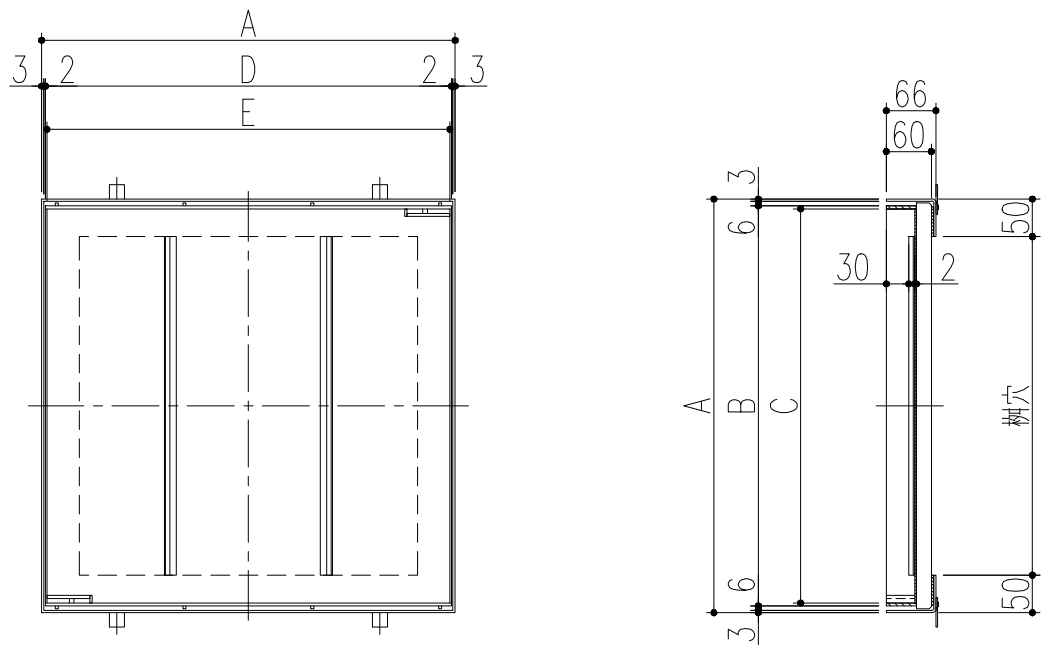

断面詳細図
(S=1/2)

取手部詳細図
(S=1/2)

仕 様

ステンレス製カラー舗装用樹蓋
STUM-1-TYPE スキマ6
材質;SUS304
表面処理;溶接焼け除去(目地部)
ステンレス製受枠
ST-CP(L-66x50x3)
材質;SUS304
;アンカー-SPCC(黒染め)
平パッキン(t=3x40)
材質;NR

600	STUM-1-600	700	682	674	690	686	12.1
450	STUM-1-450	550	532	524	540	536	8.2
300	STUM-1-300	400	382	374	390	386	4.8
樹穴	型式記号	A	B	C	D	E	計算質量 (kg/枚)

＊開閉には専用ハンドルGH-3をご使用ください。

△					第三 角 法	担 当	年 月 日	尺 度	名 称	ステンレス製カラー舗装用樹蓋 (歩道用)	図 番	DRB2180004-1										
△													製 図	後藤	18.11.30	1/10						
△																	検 図	後藤	〃			
△	アンカー仕様変更	'23.6.1	近藤	近藤																承認	近藤	〃
記 号	変更内容・理由	年 月 日	担 当	承認																		

特記事項・・・指示なき製作基準は製品規格による。